- Aesthetically pleasing versatile Area light.
- Integral driver with dimming & control options available.
- Motion detection & daylight sensor upon request.
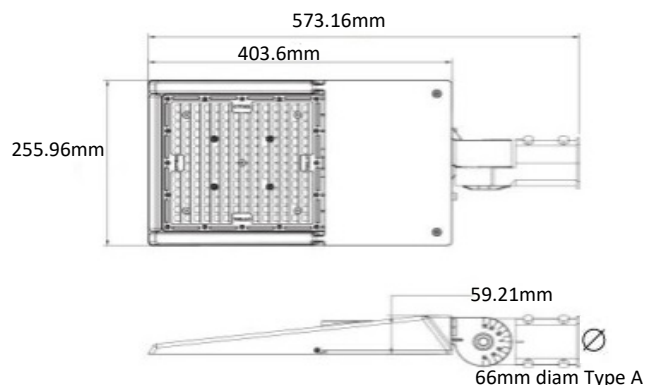
Product Information

Part Number	ALK150
Delivered Lumens +/-5%	21750lm
Power	150W
UGR	n/a
IP Rating	IP66
IK Rating	IK09
IC rating	n/a
Warranty	3 Years

LED Type	SMD
CCT	3/4/5K CCT select
CRI	70, 80
Beam Angle	Type III, IV, V
Colour Stability (SDCM)	3 step Macadam Ellipse
Led Rated Lifetime L70 @25°	>100000hrs

Driver	Integral
Mains Supply	220-240V, 50/60Hz
Driver output Voltage	DC42V
Power Factor	0.09
LED Current (nominal)	3198mA
Operating Temperature	0-40°C

Body Material	Aluminium
Diffuser Material	Ploycarbonate
Product Finish	Powder coated
Colours	Black, Bronze, Silver, White
Total Weight	4.54kg

Dimensions

573.16mm

403.6mm

255.96mm

59.21mm

66mm diam Type A

Optional mounting bracket types

Type A   Type B   Type C

Type D   Type E   Type F   Type G