



- High efficiency LED high bay, CCT select & power tunable.
- Integral driver with dimming & control options available.
- Variety of reflectors available for different beam angles.

Product Information



Part Number	HBA150
Delivered Lumens +/-5%	22500lm
Power	150W
UGR	<25
IP Rating	IP65
IK Rating	IK10
IC rating	n/a
Warranty	3 Years

LED Type	SMD
CCT	3/4/5/6.5K CCT select
CRI	80
Beam Angle	60°, 90° and 120°
Colour Stability (SDCM)	3 step Macadam Ellipse
Led Rated Lifetime L70 @25°	>54000hrs

Driver	Integral
Mains Supply	220-240V, 50/60Hz
Driver output Voltage	DC28-56V
Power Factor	0.09
LED Current (nominal)	570mA
Operating Temperature	0-40°C

Body Material	Aluminium
Diffuser Material	Glass
Product Finish	Powder coated
Colours	Black
Total Weight	1.6kg

Dimensions

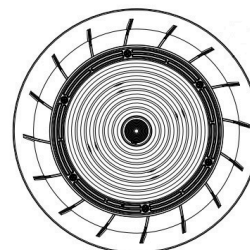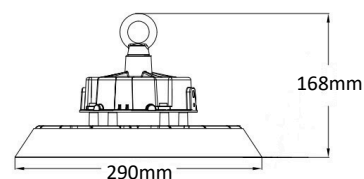

Aluminium reflector 90 degree



PC reflector in 60 or 90 degree

