




- Slide connect surface mount exit, fast installation, ceiling or wall mount.
- LiFePO4 battery with 3 year warranty.
- Also available in theatre versions.

Product Information

Part Number	EX-SU
Power	max 2.2W emergency 0.7w
Viewing distance	24m
IP Rating	IP20
Mounting type	Surface
LED Type	SMD
CCT	6.5k
Led Rated Lifetime L70 @25°	>50000hrs
Battery	LiFePO4 3.2V 1.5Ah
Mains Supply	220-240V, 50/60Hz
Driver output Voltage	DC3-5V
Power Factor	0.317
LED Current (nominal)	240mA
Operating Temperature	0-40°C
Body Material	Polycarbonate
Diffuser Material	Polycarbonate
Total Weight	0.99kg
Warranty	3 Years

Dimensions

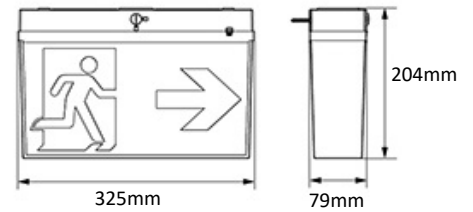

Complete set of decals

